


Rotary Press

For high speed bonding of glued materials

• Safe:	The encased rollers and gears allow for a complete safe operation.
• Versatile:	<p>This wrinkle-taming laminating rotary press handles flexible or rigid material combinations up to 1-1/8" thick in combinations of flexible/rigid, flexible/flexible and rigid/rigid materials. Paper, cloth, rubber, leather, boxboard, wood, metal and other materials are pressed quickly and easily without special preparation.</p> <p>The ideal machine for pressing finished cases following the turning-in operation. Cover materials with embossing irregularities and differences in thickness are pressed uniformly because the upper rubber roller and lower metal roller apply perfect tension at all times. They are completely adjustable to yield uniform pressure, removing trapped air and assuring a flat lamination. Variable speed control is standard.</p>
• Unattended Operation:	When placed in close proximity to the turning-in machine, the operator can slide the cover directly into the press or the cover can be dropped on a sloping roller conveyor to be fed automatically into the press.
• Ease of Maintenance:	Cleaning is a matter of minutes.
• Heavy Duty & Reliable:	Designed and ruggedly built for heavy industrial use and trouble-free maintenance.

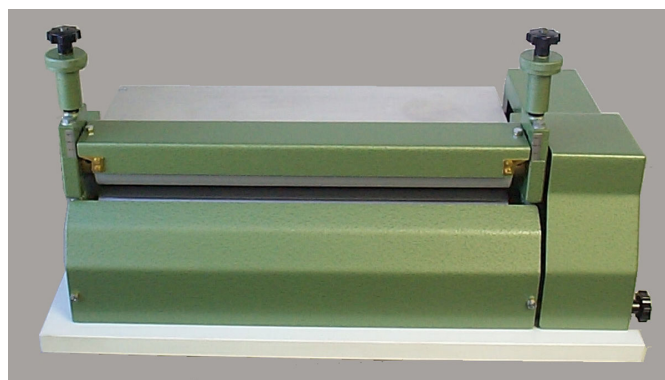

Technical Data

Model	Maximum Width Inches [mm]	Roller Speed ft./min	Feed Table Dimensions	Net Weight Lbs.	Table Space Requirements	HP 120/220V
20"	20.75" [527]	75 - 103	11.50" x 22.50"	95	17.50" x 29"	1/6
32"	32.75" [832]	75 - 103	11.50" x 34.50"	117	17.50" x 41"	1/6
42"	42.75" [1086]	75 - 103	11.50" x 44.50"	133	17.50" x 51"	1/6

Note: Technical data subject to change

MEKATRONICS, INC./BENDROR INTERNATIONAL, LTD.

85 Channel Drive, Port Washington, NY 11050 • Telephone: (516) 883-6805 • FAX: (516) 883-6948